
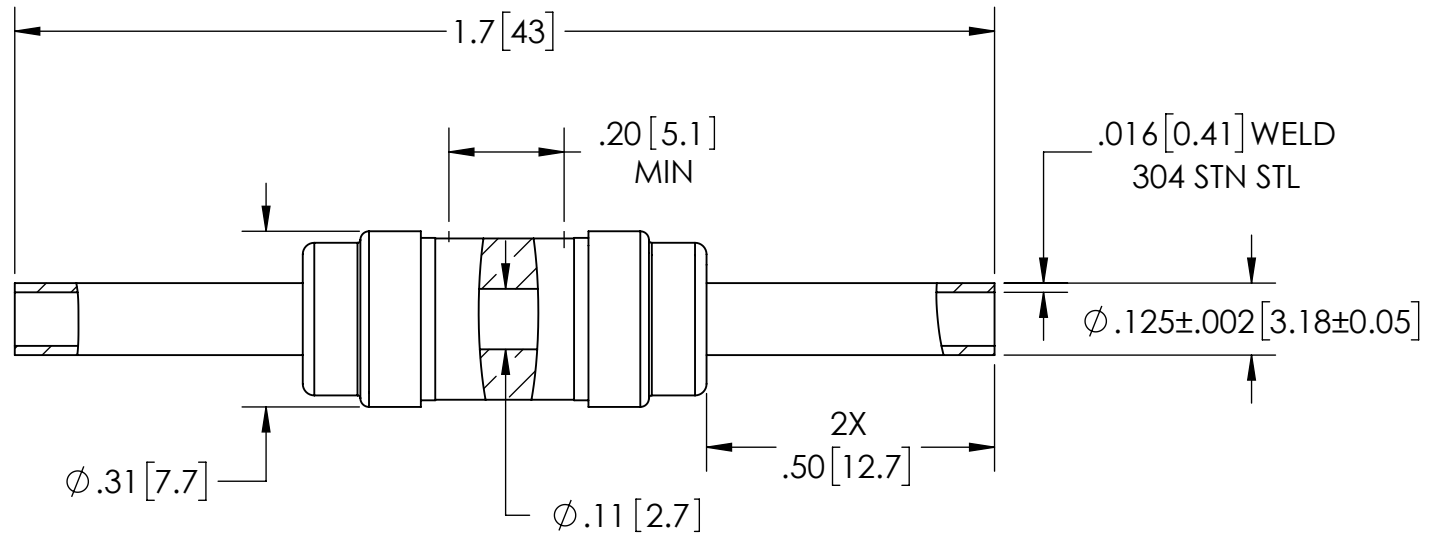




PERFORMANCE SPECIFICATIONS	
VOLTAGE:	6KV DC
PRESSURE:	1000 PSIG @ 20°C
TEMPERATURE:	-269°C TO 450°C

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				 THIRD ANGLE PROJECTION		TITLE 6KV CRYOGENIC ISOLATOR			 SOLID SEALING TECHNOLOGY	
REV.	APP'D	DATE	SCALE 3:1	DIMENSIONS IN INCHES [mm]	DRAWN	JM	3/22/2006	PART NO. FA12927 REV. C	WWW.SOLIDSEALING.COM	
C1	JF	07/15/2025	BRCL0016-01		ENG APPR.	MH	08/14/2006		SALES DWG NO. FA12927SL REV. C1	

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.