


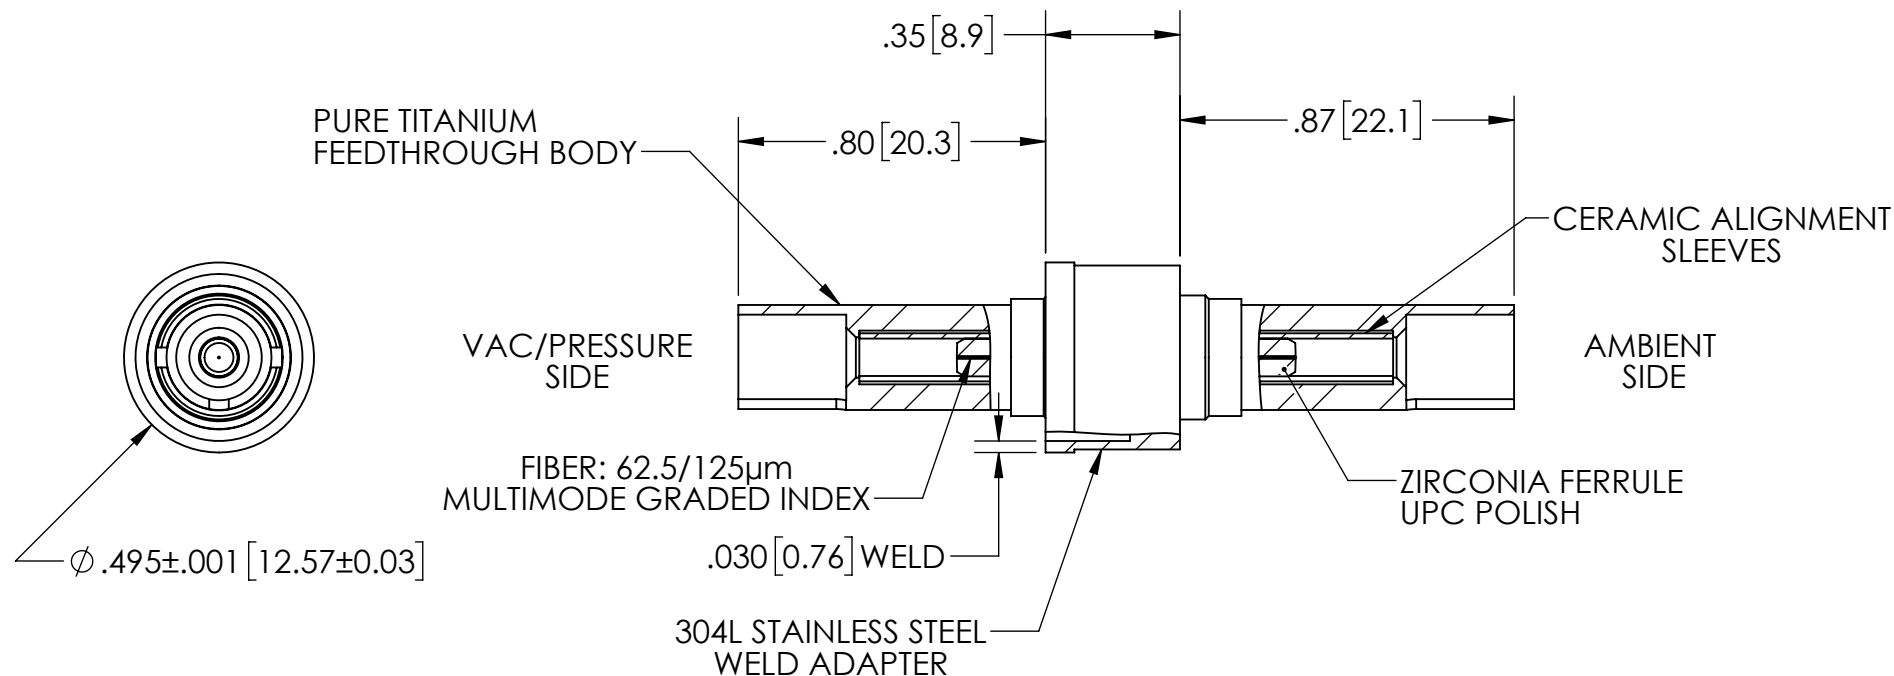


PERFORMANCE SPECIFICATIONS

.35 dB LOSS PER JUNCTION @ 850 nm TYPICAL,
.5 dB MAX (@ROOM TEMPERATURE)

OPERATING TEMPERATURE: -40°C TO 150°C

200°C BAKEOUT FOR 1 HOUR

LEAK RATE <1 X 10E-9 ATM-CC/SEC (He)

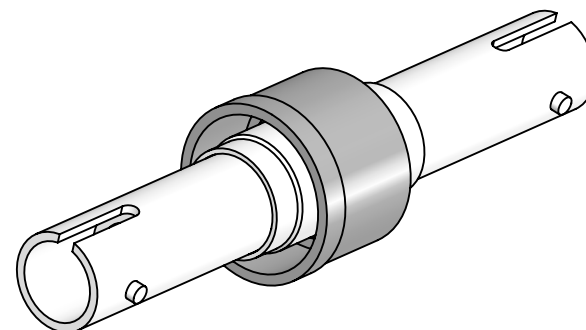

WWW.SOLIDSEALING.COM




SOLID SEALING TECHNOLOGY, INC.

SALES DWG NO. FA35762SL REV. C1

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DRAWING IS THE
SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN
PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.

THIRD ANGLE PROJECTION



TITLE:

MM FEEDTHROUGH, ST-ST

PART NO. FA35762 REV. C

REV.	APP'D	DATE	SCALE 2:1	DIMENSIONS IN	DRAWN	JF	11/27/2018
C1	JF	08/26/2019	FDN001-17SM FA35762	INCHES [mm]	ENG APPR.	JF	11/27/2018

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.