


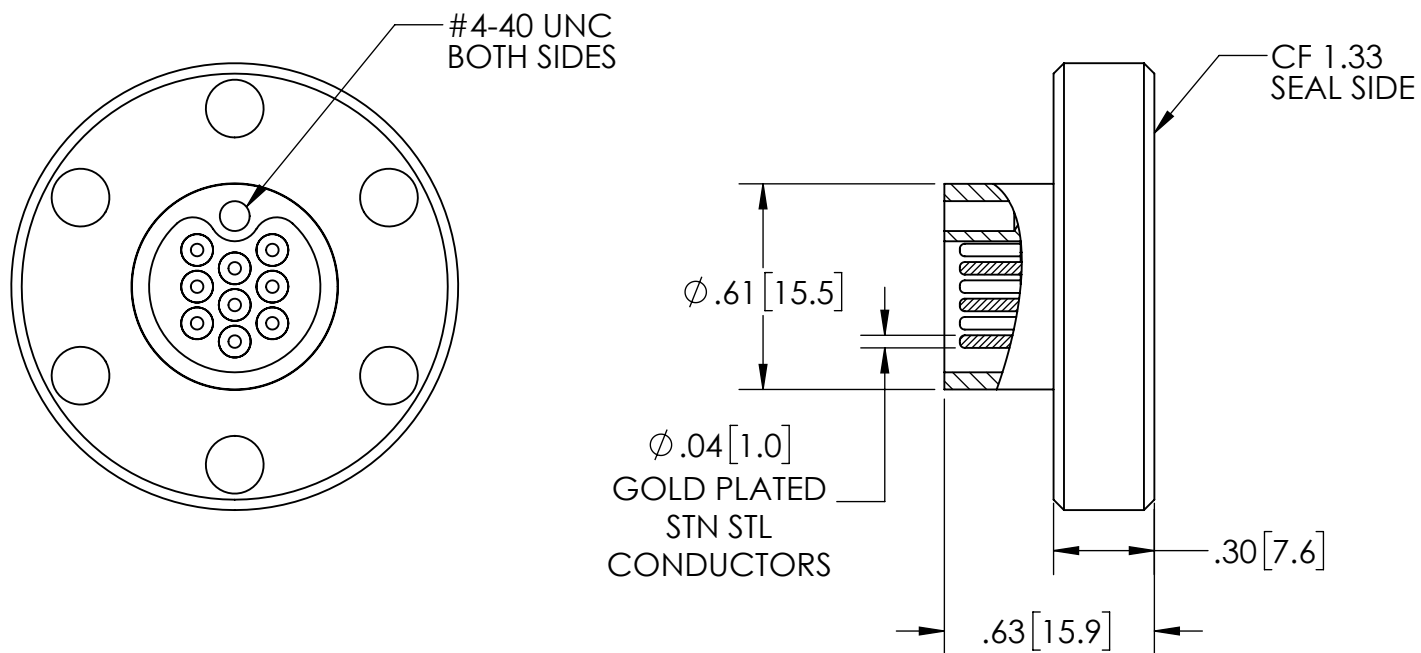

PLUG SOLD SEPERATELY:
 -PEEK PLUG FA41187 FOR USE ON BOTH SIDES
 -EXTRA CONTACTS KT14601

PERFORMANCE SPECIFICATIONS	
VOLTAGE:	500V DC
CURRENT:	5 AMPS*
TEMPERATURE:	-269°C TO 450°C

*CURRENT PER PIN MAX @ 20°C
 (UP TO 20% TOTAL NUMBER OF PINS)

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION 		TITLE 9 PIN SUB-C CONNECTOR			 SOLID SEALING TECHNOLOGY	
REV.	APP'D	DATE	SCALE 1.75:1	DIMENSIONS IN INCHES [mm]	DRAWN	MH	12/22/2020	PART NO. FA41165 REV. C	WWW.SOLIDSEALING.COM	
C1	JF	04/06/2026	MPCL0697-11		ENG APPR.	JF	12/22/2020		SALES DWG NO. FA41165SL REV. C1	

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.