
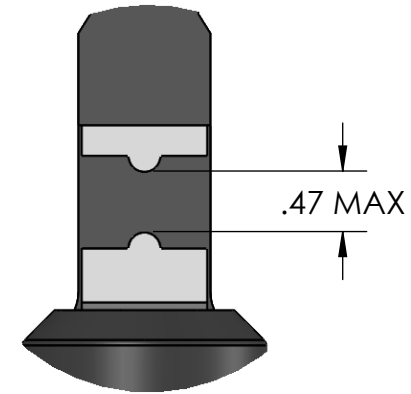



NOTES:

1- USED ON $\frac{1}{16}$ " TO $\frac{3}{8}$ " OD PINCH TUBE ASSEMBLIES

2- RECOMMENDED TO BE USED TO PINCH COPPER (.032" WALL) AND NICKEL (.035" WALL) TUBES. TUBES SHOULD BE ANNEALED.

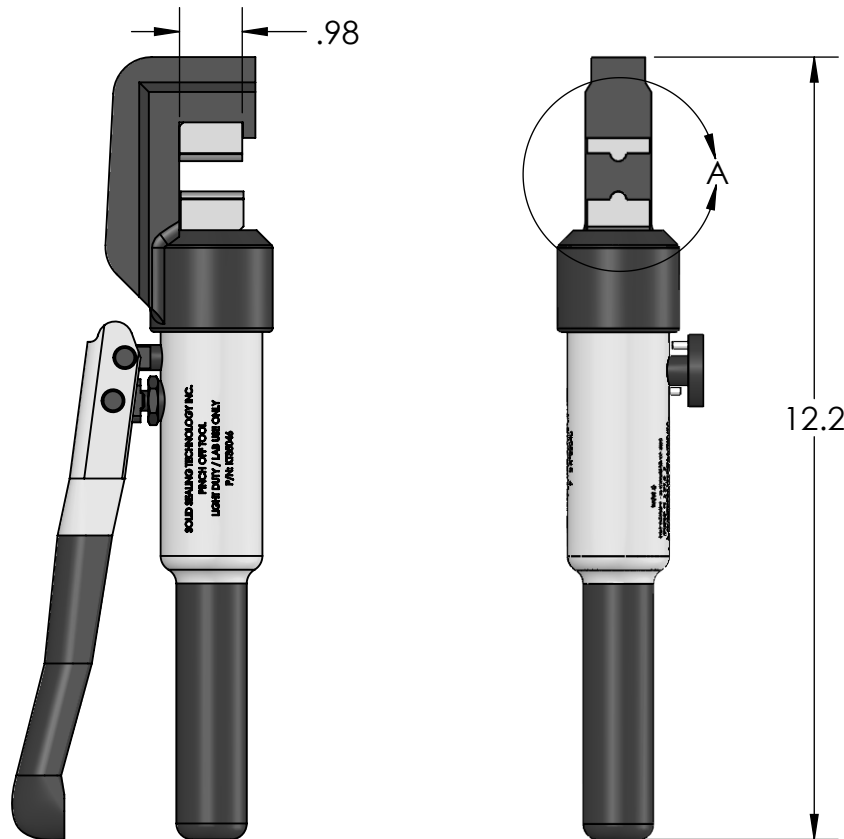

DETAIL A
SCALE 2 : 3

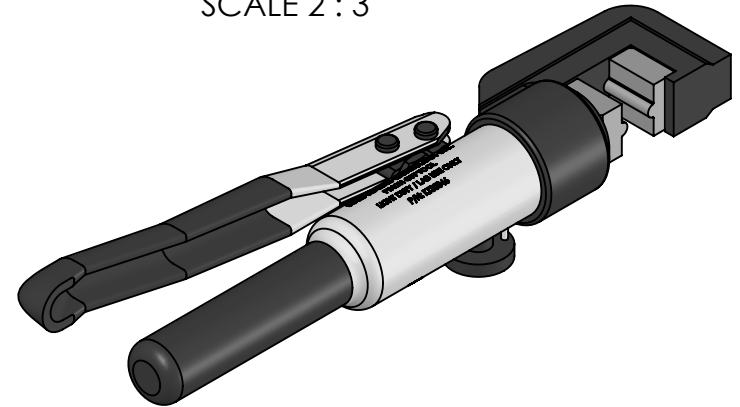

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SOLID SEALING TECHNOLOGY. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SOLID SEALING TECHNOLOGY IS PROHIBITED.				THIRD ANGLE PROJECTION		TITLE HYDRAULIC PINCH OFF TOOL		 SOLID SEALING TECHNOLOGY	
REV.	APP'D	DATE	SCALE 1:3	DIMENSIONS IN	DRAWN	MH	12/20/2016	PART NO. KT35046 REV. A	WWW.SOLIDSEALING.COM
A6	MH	7/9/2025	MSME0079-11	INCHES [mm]	ENG APPR.	MH	12/20/2016		

DIMENSIONS ARE FOR REFERENCE ONLY. UNLESS NOTED, NO TOLERANCES ARE IMPLIED. CONSULT SST TO DISCUSS YOUR SPECIFIC REQUIREMENTS.